

# Edit map

The following section describes how to work with and handle your customers' cards in day-to-day business.


## Create and edit a new card

- For processing in the PC CADDIE.id card system, you can use the DGV card<sup>plus</sup> of the customer, a guest card or any compatible RFID medium (e.g. a key fob).
- The cards can be assigned in the cash register and in the person mask. DGV cards are usually recognised automatically by PC CADDIE, while other media must be assigned to the customer manually.
- The card type is already [card type](#) is suggested by PC CADDIE.

In the following, we take any card as an example.

## Checkout procedure

Open the cash register and place the card on the RFID reader:

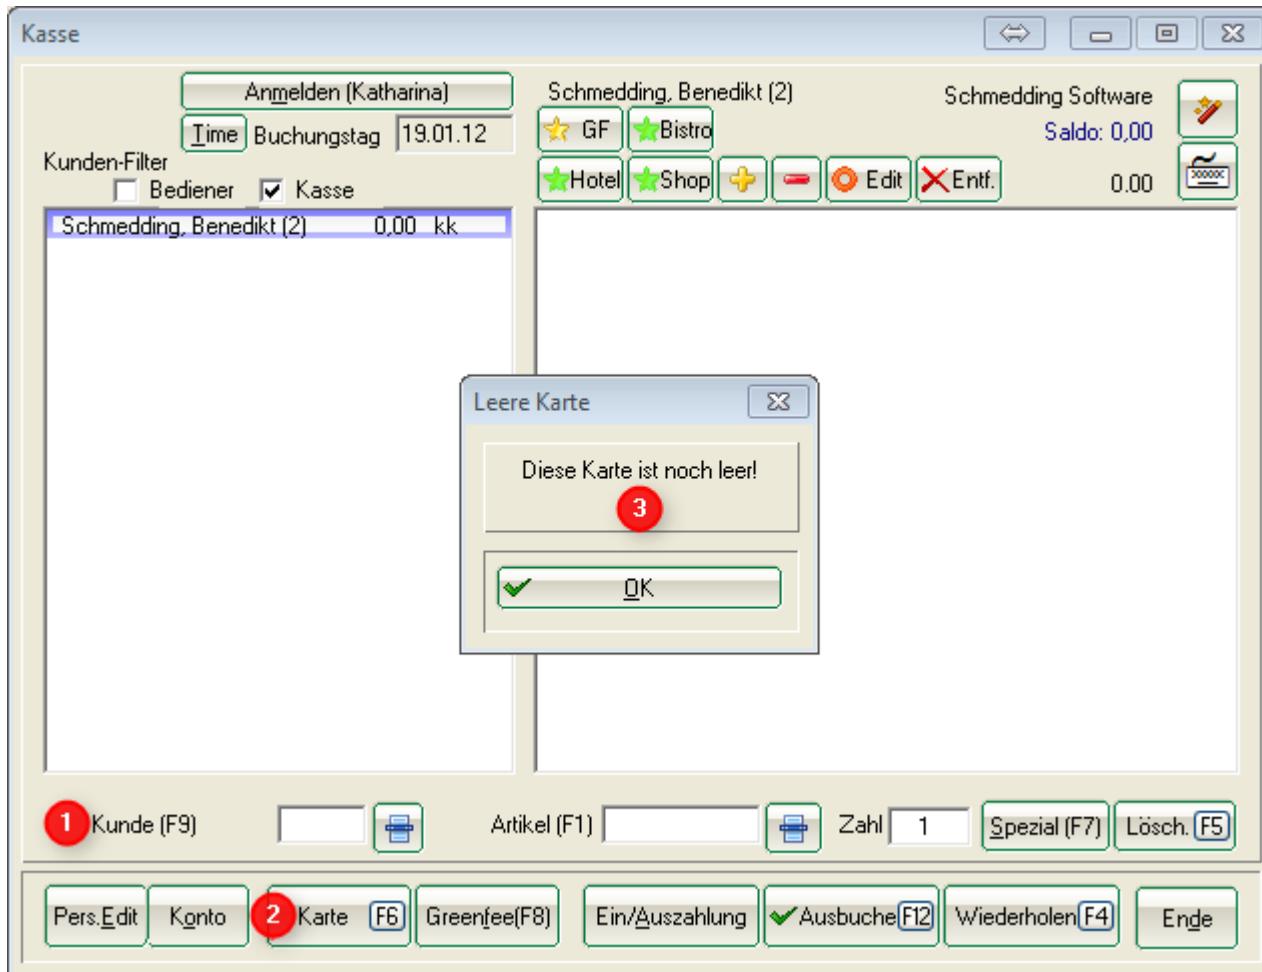

1. Select the customer.
2. Click on **Card** (F6).
3. Confirm the assignment of the empty card



( only in the offline system).

TIP PC CADDIE can automatically recognise cards that have already been personalised after they have been placed on the reader and book the correct person into the cash register. To do this, activate the option **Automatically recognise card** in the [Basic settings](#). For new assignments with an association card, points 1-3 are automated as the data is automatically read out by PC CADDIE.

**Card Details**

<u>Title:</u>	<input type="text"/>	
<u>1st name:</u>	<input type="text" value="Jochen"/>	
<u>2nd name:</u>	<input type="text" value="Bitschene"/>	
<u>Club:</u>	<input type="text" value="0499001 - Guest"/>	
<u>Number:</u>	<input type="text" value="499001100029"/>	<u>Version:</u> <input type="text" value="1"/>
<u>Valid:</u>	<input type="text" value="31.12.12"/>	
<u>Handicap:</u>	<input type="text" value="--"/>	<u>on:</u> <input type="text" value="01.01.12"/>
<u>Gender:</u>	<input type="text" value="1 - Male"/>	
<u>Age class:</u>	<input type="text" value="4 - Adult"/>	
<u>Play. permit:</u>	<input type="text" value="not regional / full rights"/>	
<u>Function:</u>	<input type="text"/>	
<u>Date of birth:</u>	<input type="text"/>	
<u>Date of entry:</u>	<input type="text"/>	
<u>Special:</u>	<input type="text"/>	

The processing procedure can be continued as follows:

Card

Teste, Timo (M.75F29735)

1 Type:	1 - Member	OK
2 Valid from:	.. to 31.01.13	Cancel
3 Rangefee:	.. Set to "today" F3	
4 Value:	0,00 + 50,00 = 50,00	
5 Saldo:	0,00 + 5,00 = 5,00	
6 Credit limit:	50,00	
Info:	0499002001135001	
7 Permission:		
8 Person information	F7	
9 Card history	F8	
10 Special points		
11 Delete F5		
12 Return (F6)		
13 Chip-ID F11		
14 Info		




When opening the map for the first time, some buttons may not yet appear.

1. Here the **card type** is selected here. PC CADDIE suggests the preconfigured card type for members and guests.
2. The validity is suggested according to the default settings and can be changed here. For *Date to* instead of a date, you can also enter e.g. „+ 5“ instead of a date. This means that the card is valid from the **first use** is valid for 5 days.
3. This prevents the range fee from being automatically debited until the date entered (e.g. tournament players).
4. Enter the **monetary value** to be charged to the card.
5. Enter the **points value** enter the point value.
6. If you are giving the customer a **credit** enter the limit in this field. The card bookings are automatically entered in the **OP**-account so that it can be invoiced.
7. ! The authorisation of the card is determined here. Only those machines can be used which are authorised for this card by ticking the box, unless a separate activation has been carried out using special settings. For example, it is possible to automatically grant access to the caddy hall to all persons who have a caddy locker. Please contact the **PC CADDIE Support**
8. The **person information** can be accessed here.
9. The **card history** lists all card transactions.
10. The button **Special points** must be specially activated.



Here you can assign 50 weekly free points to various special offers or alternatively to the president's wife.

The upper area is for individual points with a certain validity and the lower area defines the regular points.

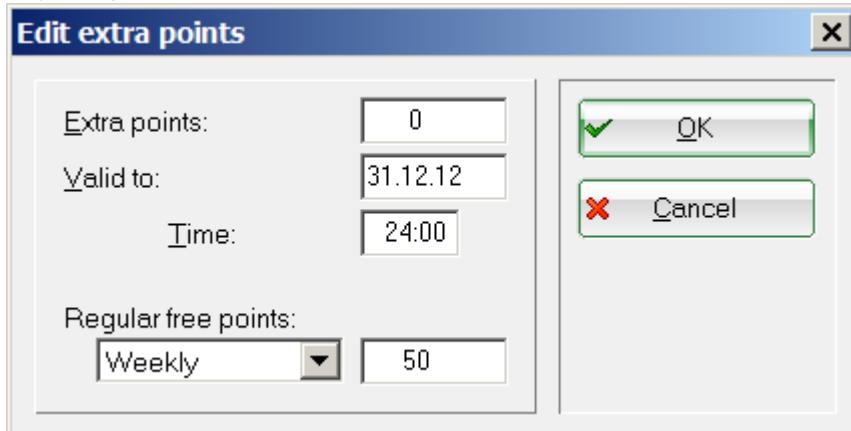

11.  **Delete** cancels the allocation and the card account is deleted. Any credit must be cancelled beforehand.
12. **Return** cancels the assignment of the card so that it can be reassigned.
13. All associated chip IDs are saved here. A credit can be played using several media.
14. **Info** Displays the current offline content of the chip (offline system).

Now click on **Save**, to save your entries. The following prompt will now appear:

**Payment**

Enter the payment:

Paying person: tet2 Tester, Timo

To pay: >>> 119,00

Payment method:

		Amount
F1	cash	Cash register 119,00
F2	cc	Credit card 0,00
F3	ec	EC-Card 0,00
F4	cwmaster	Mastercard 0,00

Rest: 0,00

Print receipt F5 Normally no receipt

Book as invoice into account F11

2 At checkout F12

Transferred to another customer

1 Ok Club card F6 Discount (F7) Hotel (F9) Cancel

1. Select the payment method and confirm with **OK**, to finalise the process.
2. Continue to checkout in the cash register and add other items.

## Person procedure

In the PC CADDIE menu, click on **Persons/...create new, edit, delete** and select a person. Click on the button **Karte**:

Person: Tester, Timo X

Name	Search abbr.	tet2	No	099.0001.100040	<input type="button" value="Select No."/>
Title			Addr.(Pers.)		
First name	Timo				
Name	Tester				
 Competition		 Cash register		 Timetable	 Intranet
<input type="button" value="Status"/> <input type="button" value="1st Addr."/> <input type="button" value="2nd Addr."/> <input type="button" value="Bank"/> <input type="button" value="Infos"/> <input type="button" value="Memo"/>					
Exact HCP	5,0		<input type="button" value="Handicap recd"/>		
Homeclub			<input type="button" value=""/> <input type="button" value=""/> <input type="button" value=""/>		
Homeclub-ID	100040				
Gender	1 -  Male		<input type="button" value=""/>		
Age group	1 - Child under 12		<input type="button" value=""/>		
Membership	1 - Full		<input type="button" value=""/>		
Status	0 -		<input type="button" value=""/>		
Unused	0 -		<input type="button" value=""/>		
Additional info			<input type="button" value=""/>		
<input type="checkbox"/> membership card					
D.O.B.	<input type="button" value=".."/>	Entry	08.07.16	Resign	<input type="button" value=".."/>

Confirm the assignment of the blank card.

The card is now assigned. Finally, click on **Save** or continue the process as described above.

## Block card/chip ID

If necessary, e.g. if a member has lost their card, you can block a [block a card account or a chip ID](#).

## Cancelling/deleting a card

Before a card can be cancelled, the balance must be cleared. This is done by calling up the card account and making a clearing entry. The card can then be called up again and cancelled.